

This Page Is Inserted by IFW Operations
and is not a part of the Official Record

BEST AVAILABLE IMAGES


Defective images within this document are accurate representations of the original documents submitted by the applicant.

Defects in the images may include (but are not limited to):

- BLACK BORDERS
- TEXT CUT OFF AT TOP, BOTTOM OR SIDES
- FADED TEXT
- ILLEGIBLE TEXT
- SKEWED/SLANTED IMAGES
- COLORED PHOTOS
- BLACK OR VERY BLACK AND WHITE DARK PHOTOS
- GRAY SCALE DOCUMENTS

IMAGES ARE BEST AVAILABLE COPY.

**As rescanning documents *will not* correct images,
please do not report the images to the
Image Problem Mailbox.**

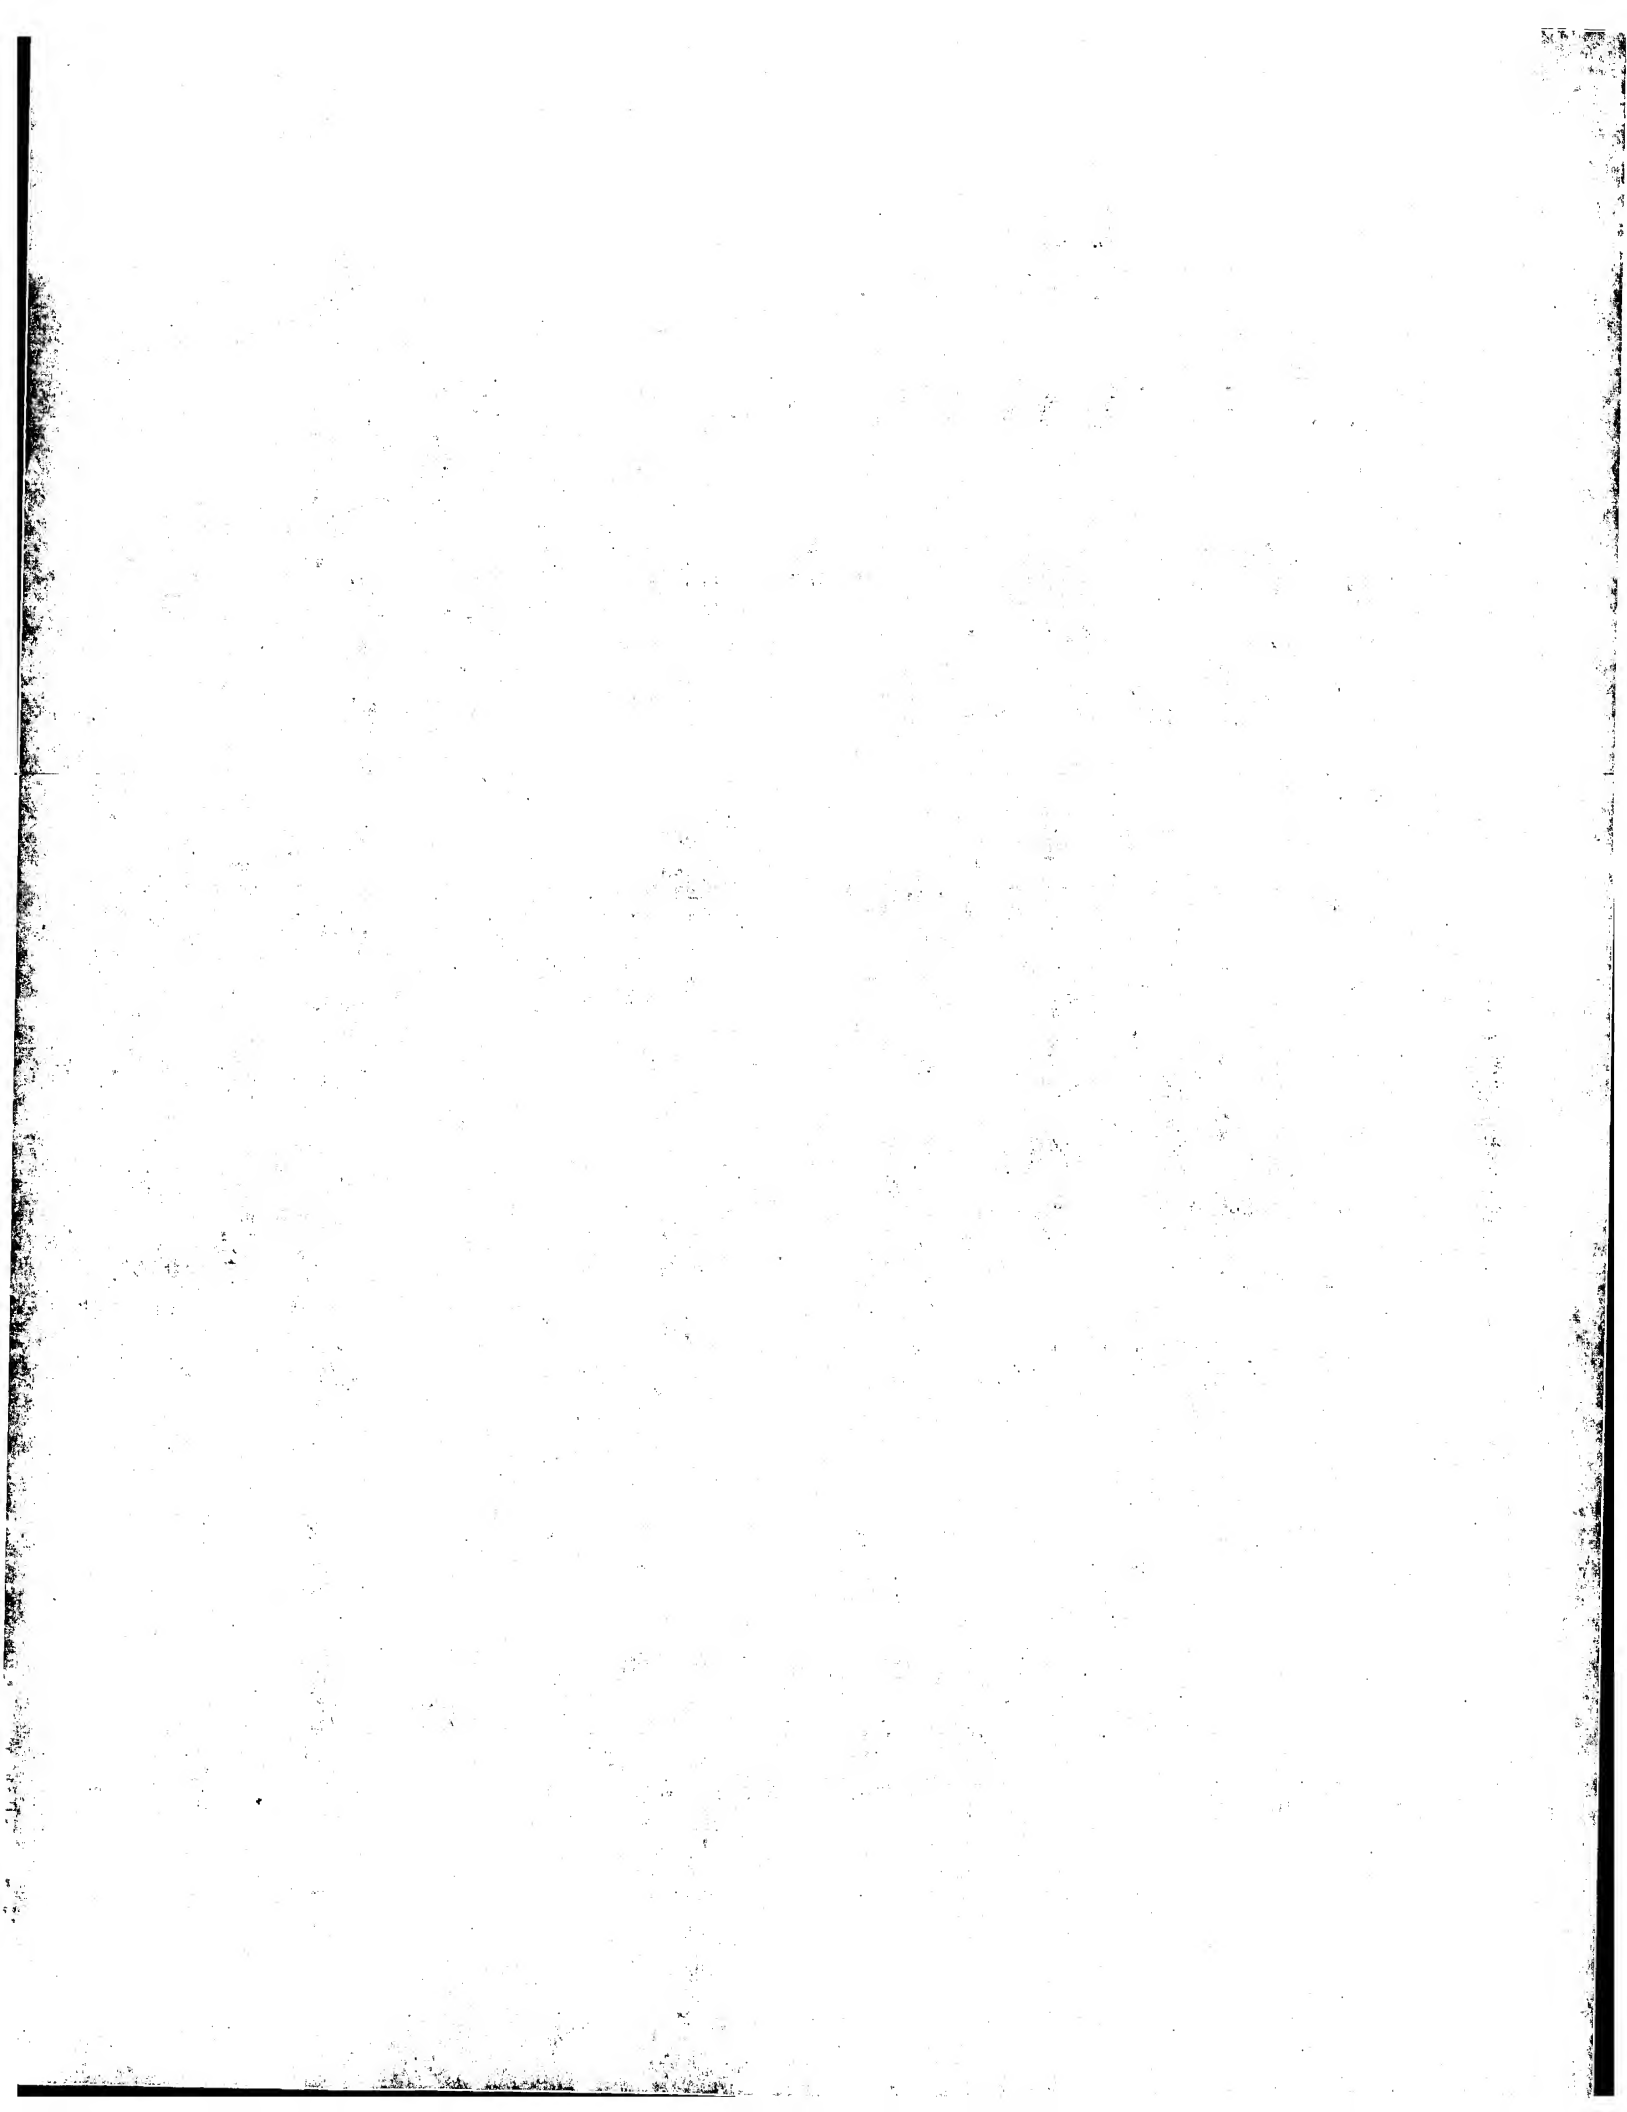

**(19) World Intellectual Property Organization
International Bureau**



1 2 3 4 5 6 7 8 9 10 11 12 13 14 15 16 17 18 19 20 21 22 23 24 25 26 27 28 29 30 31 32 33 34 35 36 37 38 39 40 41 42 43 44 45 46 47 48 49 50 51 52 53 54 55 56 57 58 59 60 61 62 63 64 65 66 67 68 69 70 71 72 73 74 75 76 77 78 79 80 81 82 83 84 85 86 87 88 89 90 91 92 93 94 95 96 97 98 99 100 101 102 103 104 105 106 107 108 109 110 111 112 113 114 115 116 117 118 119 120 121 122 123 124 125 126 127 128 129 130 131 132 133 134 135 136 137 138 139 140 141 142 143 144 145 146 147 148 149 150 151 152 153 154 155 156 157 158 159 160 161 162 163 164 165 166 167 168 169 170 171 172 173 174 175 176 177 178 179 180 181 182 183 184 185 186 187 188 189 190 191 192 193 194 195 196 197 198 199 200 201 202 203 204 205 206 207 208 209 210 211 212 213 214 215 216 217 218 219 220 221 222 223 224 225 226 227 228 229 230 231 232 233 234 235 236 237 238 239 240 241 242 243 244 245 246 247 248 249 250 251 252 253 254 255 256 257 258 259 260 261 262 263 264 265 266 267 268 269 270 271 272 273 274 275 276 277 278 279 280 281 282 283 284 285 286 287 288 289 290 291 292 293 294 295 296 297 298 299 300 301 302 303 304 305 306 307 308 309 310 311 312 313 314 315 316 317 318 319 320 321 322 323 324 325 326 327 328 329 330 331 332 333 334 335 336 337 338 339 340 341 342 343 344 345 346 347 348 349 350 351 352 353 354 355 356 357 358 359 360 361 362 363 364 365 366 367 368 369 370 371 372 373 374 375 376 377 378 379 380 381 382 383 384 385 386 387 388 389 390 391 392 393 394 395 396 397 398 399 400 401 402 403 404 405 406 407 408 409 410 411 412 413 414 415 416 417 418 419 420 421 422 423 424 425 426 427 428 429 430 431 432 433 434 435 436 437 438 439 440 441 442 443 444 445 446 447 448 449 450 451 452 453 454 455 456 457 458 459 460 461 462 463 464 465 466 467 468 469 470 471 472 473 474 475 476 477 478 479 480 481 482 483 484 485 486 487 488 489 490 491 492 493 494 495 496 497 498 499 500 501 502 503 504 505 506 507 508 509 510 511 512 513 514 515 516 517 518 519 520 521 522 523 524 525 526 527 528 529 530 531 532 533 534 535 536 537 538 539 540 541 542 543 544 545 546 547 548 549 550 551 552 553 554 555 556 557 558 559 560 561 562 563 564 565 566 567 568 569 570 571 572 573 574 575 576 577 578 579 580 581 582 583 584 585 586 587 588 589 590 591 592 593 594 595 596 597 598 599 600 601 602 603 604 605 606 607 608 609 610 611 612 613 614 615 616 617 618 619 620 621 622 623 624 625 626 627 628 629 630 631 632 633 634 635 636 637 638 639 640 641 642 643 644 645 646 647 648 649 650 651 652 653 654 655 656 657 658 659 660 661 662 663 664 665 666 667 668 669 670 671 672 673 674 675 676 677 678 679 680 681 682 683 684 685 686 687 688 689 690 691 692 693 694 695 696 697 698 699 700 701 702 703 704 705 706 707 708 709 710 711 712 713 714 715 716 717 718 719 720 721 722 723 724 725 726 727 728 729 730 731 732 733 734 735 736 737 738 739 740 741 742 743 744 745 746 747 748 749 750 751 752 753 754 755 756 757 758 759 760 761 762 763 764 765 766 767 768 769 770 771 772 773 774 775 776 777 778 779 780 781 782 783 784 785 786 787 788 789 790 791 792 793 794 795 796 797 798 799 800 801 802 803 804 805 806 807 808 809 810 811 812 813 814 815 816 817 818 819 820 821 822 823 824 825 826 827 828 829 830 831 832 833 834 835 836 837 838 839 840 841 842 843 844 845 846 847 848 849 850 851 852 853 854 855 856 857 858 859 860 861 862 863 864 865 866 867 868 869 870 871 872 873 874 875 876 877 878 879 880 881 882 883 884 885 886 887 888 889 890 891 892 893 894 895 896 897 898 899 900 901 902 903 904 905 906 907 908 909 910 911 912 913 914 915 916 917 918 919 920 921 922 923 924 925 926 927 928 929 930 931 932 933 934 935 936 937 938 939 940 941 942 943 944 945 946 947 948 949 950 951 952 953 954 955 956 957 958 959 960 961 962 963 964 965 966 967 968 969 970 971 972 973 974 975 976 977 978 979 980 981 982 983 984 985 986 987 988 989 990 991 992 993 994 995 996 997 998 999 1000 1001 1002 1003 1004 1005 1006 1007 1008 1009 1010 1011 1012 1013 1014 1015 1016 1017 1018 1019 1020 1021 1022 1023 1024 1025 1026 1027 1028 1029 1030 1031 1032 1033 1034 1035 1036 1037 1038 1039 1040 1

(43) International Publication Date
16 August 2001 (16.08.2001)

PCT

(10) International Publication Number
WO 01/58997 A1

(51) International Patent Classification⁷: C08K 5/00,
13/02, C08L 77/00 // (C08K 13/02, 5:00, 3:40)

(21) International Application Number: PCT/US01/04279

(22) International Filing Date: 9 February 2001 (09.02.2001)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:
60/181,759 11 February 2000 (11.02.2000) US

(71) Applicant: E.I. DUPONT DE NEMOURS AND COMPANY [US/US]; 1007 Market Street, Wilmington, DE 19808 (US).

(72) Inventors: KOSHIDA, Reiko; 2-4-32 Shukugo, Utsumomiya, Tochigi 321-0945 (JP). HATASE, Yoshiteru; 674-3-802 Kuzumoto-cho, Kashihara-shi, Nara 634-0007 (JP).

(81) Designated States (national): AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BY, BZ, CA, CH, CN, CR, CU, CZ, DE, DK, DM, DZ, EE, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NO, NZ, PL, PT, RO, RU, SD, SE, SG, SI, SK, SL, TJ, TM, TR, TT, TZ, UA, UG, UZ, VN, YU, ZA, ZW.


(84) Designated States (regional): ARIPO patent (GH, GM, KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, CH, CY, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE, TR), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GW, ML, MR, NE, SN, TD, TG).

Published:

- with international search report
- before the expiration of the time limit for amending the claims and to be republished in the event of receipt of amendments

For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.

(54) Title: THERMOPLASTIC RESIN COMPOSITIONS FOR LASER WELDING AND ARTICLES FORMED THEREFROM

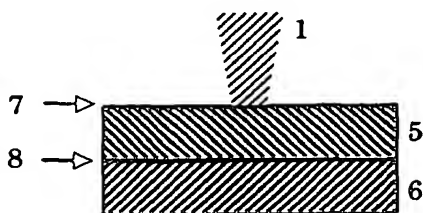

(57) Abstract: Thermoplastic resin compositions are disclosed that incorporate 1:2 metallic azo complex dyes and are particularly suitable for laser welding. These compositions include a variety of thermoplastic resins such as polyamides and copolymers and blends thereof. The compositions offer superior welding properties and provide for the welding of articles identically colored with these dyes.

WO 01/58997 A1

TITLE

THERMOPLASTIC RESIN COMPOSITIONS FOR LASER WELDING AND ARTICLES FORMED THEREFROM

5

FIELD OF THE INVENTION

The instant invention relates to thermoplastic resin compositions incorporating organic dyes. More particularly, the instant invention relates to such compositions used in the laser welding of articles and wherein the dye is a metallic azo complex dye.

10

BACKGROUND OF THE INVENTION

It is known in the art to join together articles of two resins (one colored and opaque and the other colored and transparent) by applying energy with laser beams. This is accomplished by positioning the articles in contact with each other, and transmitting a predetermined amount of laser beam energy focused on the area of contact, thereby causing the junction portion to be melted and joined together (known generally as "laser welding"). Several advantages flow from laser welding. For example, laser welding is widely perceived as a simple, labor saving operation, with attendant improvements in productivity and reductions in production cost. This technique is useful in various applications including the preparation of molded articles suitable for automotive applications.

15

20

25

Recent attention has been directed to laser welding using blends of thermoplastic resins and colorants. The colorants typically contain an organic dye or pigment to control the conversion of laser energy to heat. In a conventional arrangement, the laser beam penetrates through a transparent colored article, positioned closest to laser beam source, and is then largely absorbed in the opaque colored article. The latter article has a relatively higher absorption coefficient in comparison with the transparent article, and this is attributed to the use of an appropriate amount of colorants. The net effect is that the area of contact of the

30

transparent and opaque articles is melted and the surfaces are thereby joined together. See for example Japanese Published (Koukoku) Patent No.62-49850, Japanese Published (Koukoku) Patent No.5 (93)-42336.

5 Other resin composition associated with laser welding are described in U.S.Pat.No.5,893,959, which discloses transparent and opaque workpiece parts welded together by a laser beam along a joining zone. Both parts contain black dye pigments such as carbon black to cause them to offer a substantially homogenous visual impression even after welding.

10 However, a difficulty associated with conventional compositions used in laser welding is that when a laser beam is transmitted through a first article (having laser beam transmitting colorants) to a second article (containing laser beam absorbing colorants), the two articles must have different transmission and
15 absorption coefficients. This unfortunately makes it difficult to weld together articles having the same color. Moreover, thermoplastic components may be blackened by the addition of carbon black or nigrosine, as is commonly done in for example automotive applications. However, carbon black and nigrosine cannot transmit a laser beam with a main wavelength (1200 nm to 800 nm), such as
20 Nd:YAG laser and a diode laser.

 Surprisingly, it has now been found that including a specific weight percentage of 1:2 type metallic azo complex dye in thermoplastic resin compositions such as polyamide resin compositions used for laser-weldable molded articles results
25 into both the transparent and opaque articles for the laser beam having the same color of black. This allows for a significantly improved transmission coefficient for the near-infrared spectrum of the laser beam, with excellent and balanced heat-resistance and mechanical properties required in automobile application.

SUMMARY OF THE INVENTION

Improved compositions suitable for laser welding are disclosed herein, comprising a thermoplastic resin and a 1:2 type metallic azo complex dye.

5


Moreover, there are disclosed and claimed herein thermoplastic resin compositions for laser welding comprising:

1) at least one thermoplastic resin; and,

2) a black colorant having at least one of the metal azo complex dyes of

10 the following formulas:


The formula [I]

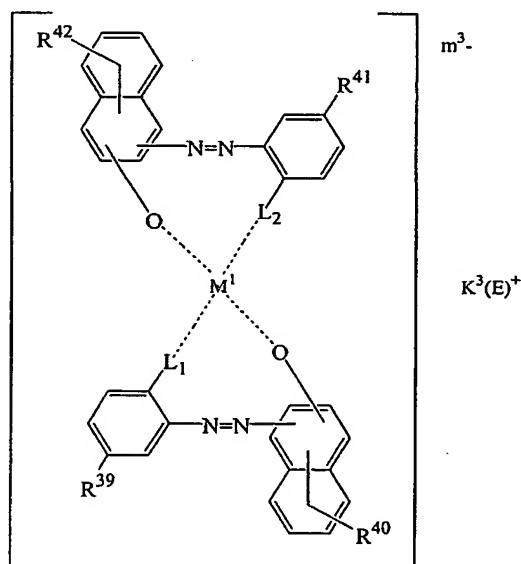

-----[I]

15

Wherein R^{39}, R^{41} , which may be the same or different, are Cl,



, or $SO_2R^{43}, R^{44}, R^{45}$, which may be the same or different, are independently


hydrogen atom, linear or branched C1-C4alkyl, R^{43} is linear or branched C1-C4alkyl, R^{40} , R^{42} , which may be the same or different, are hydrogen, linear or branched C1-C18alkyl group, linear or branched C2-C18alkenyl group, sulfonamide group, carboxyl group, mesyl group, hydroxyl group, C1-C18 alkoxy group, acethylamino group, benzoylamino group, a halogen atom or $-\text{CONH}-R^{46}$, R^{46} is functional group selected from unsubstituted or substituted linear or branched C1-C18alkyl or unsubstituted substituted C6-C18 aryl group, L_1 and L_2 are independently O or COO,

$(E)^+$ are H^+ ; cation of alkali metal, ammonium ion, cations of organic amine including aliphatic primary, secondary and ternary amines, quaternary ammonium ion.

, K^3 is an integer, m^3 is 0, 1 or 2,


M^1 is a kind of metals, preferably metals having coordination numbers of from 2 to 4, more preferably trivalent metal such as Cr, Fe, Cu;

15 The formula [II]

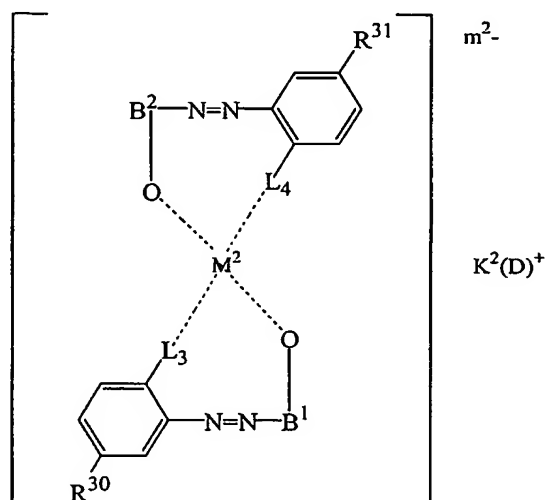

-----[II]

wherein R^{30} and R^{31} , which may be the same or different, are Cl,



SO_2R^{32} , or H,

R^{33} and R^{34} , which may be the same or different, are independently hydrogen atom, linear or branched C1-C4alkyl,

R^{32} is linear or branched C1-C4alkyl, L_3 and L_4 are independently O or COO,


- 5 (D)⁺ is hydrogen ion, cation of alkali metals, ammonium ion, cations of organic amine including aliphatic primary, secondary and tertiary amines, quaternary ammonium ion,

K^2 is an integer, m^2 is 0, 1 or 2,

M^2 is metals of atomic numbers of from 2 to 4 such as

- 10 Zn, Sr, Cr, Al, Ti, Fe, Zr, Ni, Co, Mn, B, Si and Sn, preferably metal of atomic numbers of 3 such as Cr, Co, Cu, Ni, Al.


B is represented by formula



-----[III]


15

or

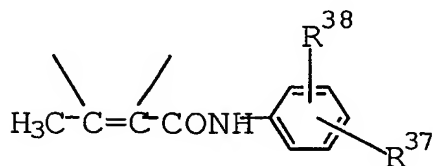

-----[IV]


- 20 wherein R^{35} and R^{37} , which may be the same or different, are Cl, SO_2R^{32} , or H,



R^{33} and R^{34} , which may be the same or different, are independently hydrogen atom, linear or branched C1-C4alkyl, and R^{36} and R^{38} , which may be the same or different,


are independently hydrogen atom, linear or branched C1-C18 alkyl, carboxyl, hydroxyl, C1-C18 alkoxy, amino or halogen atoms.

5 This dye may preferably be selected from any of formula (1)

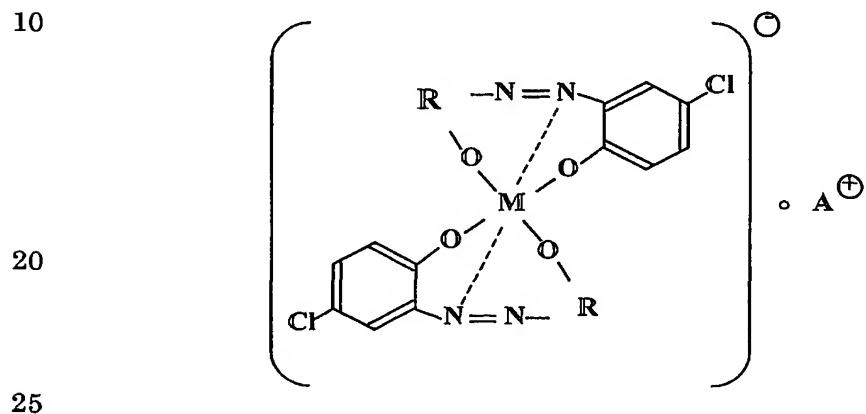


Wherein R is a residual group of a coupling agent, M is divalent or trivalent metal, and A is hydrogen, aliphatic amine with 4 to 18 carbon atoms, or alkylene oxide added amine;

30 or formula (2)

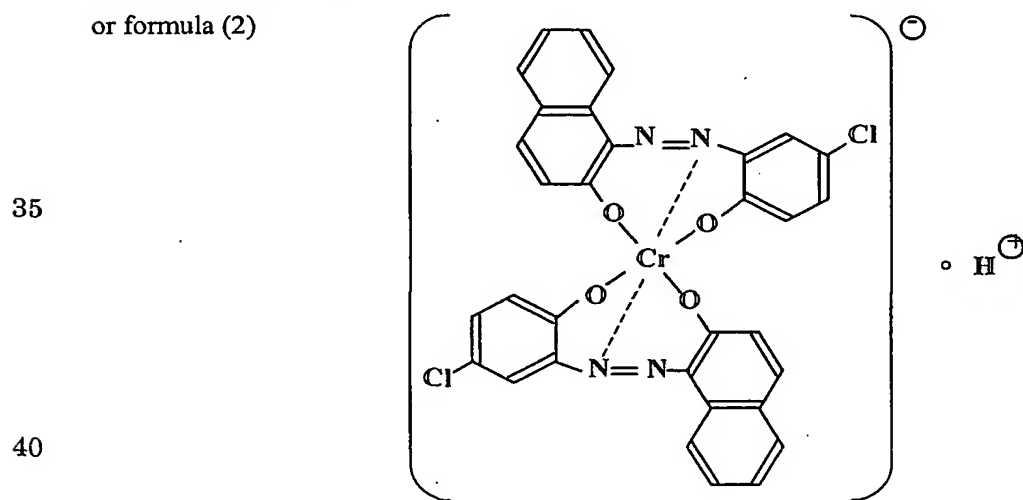

or formula(3)

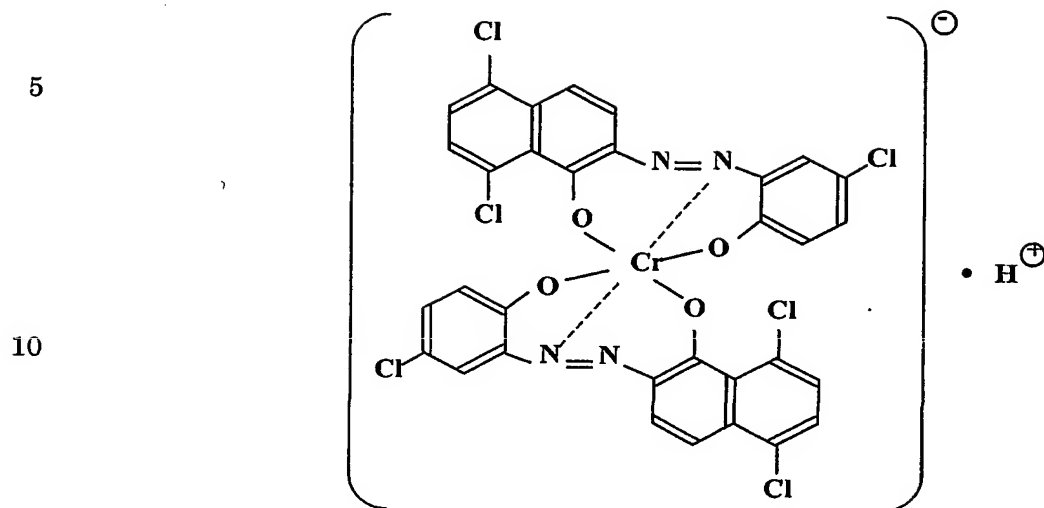

15 Other aspects of the invention are directed not only to the improvement in laser weldability seen with the resin compositions described and claimed herein, but also the articles formed therefrom. This includes shaped articles formed from discrete sections and subsequently welded together with the laser beam. The invention is further directed to the method for actually welding these articles

20 together.

BRIEF DESCRIPTION OF THE DRAWINGS

25 The invention will become better understood upon having reference to the drawings herein.

FIGURE 1 is a view of articles of differing colors to be laser welded in contact with each other and with a laser beam applied thereto; and

30 FIGURE 2 is a view of articles of identical colors to be laser welded in contact with each other and with a laser beam applied thereto.

DETAILED DESCRIPTION OF THE INVENTION

The resins utilized as the molded resins for laser welding may be any resin
5 as long as they are thermoplastic resins, but polyamide resins and polyester resins
are preferred from the point of view of heat-resistance and transmitting property.

Polyamides useful in this invention include not only conventional nylons,
but also copolymers of amides and/or other monomers and blends of different
polyamides. The blends may include other thermoplastic polymers and/or blends of
10 the aforementioned copolymers with a polyamide and/or blends of different
copolymers with or without thermoplastic polymers. Examples of polyamides
suitable for the practice of this invention are polyamide 6 or 6/6, in which the
addition of azo-metal complex dyes illustrate the substantial and surprising increase
in laser weldability without sacrificing other important properties of the molded
15 article. Polyamide 6 is especially advantageous because its low rate of crystallization
results in an increased transmission coefficient for laser beams with particular
wavelengths but without any adverse effect on required toughness and warpage.
Further it is advantageous in applications such as automobile parts with its balanced
range of heat-resistance and mechanical properties.

20 A wide range of the most common polyester molding compositions useful
for blending with colorants in the practice of the present invention are known in the
art and includes polyethylene terephthalate homopolymers, polybutylene
terephthalate homopolymers, polyethylene terephthalate/polybutylene terephthalate
copolymers, polyethylene terephthalate/polybutylene terephthalate mixtures, and
25 mixtures thereof, although other polyesters can be used as well, alone, in
combination with each other, or in combination with those polyesters listed above.

Azo-metal complex dyes suitable for use in this invention vary widely and
include any azo-metal complex. As used herein the term "azo-metal complex dyes"
30 refers to 1:2 type metallic azo complex dyes. Illustrative of such useful dyes are
azo-metal complex dyes as identified above. Other useful azo-metal complex dyes
are those described in detail in US 4,527,994 which is incorporated by reference

herein.

In the preferred embodiment of the invention, the azo-metal complex dyes for use in the invention are those respectively having the formula(2) as above or the formula (3) as above. Moreover, the azo-metal complex dye is preferably present in amount of from 0.01 to 1 % by weight, when the composition comprises polyamide 6 or polyamide 66 as at least the major component of the polyamide resin composition.

Azo-metal dyes of colors other than black and/or other dyes of colors other than black, such as anthraquinone, perinone, or quinophthalone dyes, can be also added to the composition of the present invention for the purposes of appearance adjustment providing such additional dyes are used in such amounts that they do not harm the characteristic properties of the composition of the present invention.

The composition of the present invention may also contain an inorganic filler or reinforcing agent. These include, for example, fibrous reinforcement such as glass fiber, glass flake, carbon fiber, glass beads, talc, kaolin, wollastonite and mica. Glass fiber or glass flake is particularly preferred. Glass fibers suitable for use in the present invention are those generally used as a reinforcing agent for thermoplastic resins and thermosetting resins.

One or more optional compounds tailored for different applications of the resin compositions of this invention can be included in the composition according to the present invention. Typically, additive compounds can include flame retardants, impact modifiers, viscosity modifiers, heat resistance improvers, lubricants, antioxidants and UV-and other stabilizers. The polyamide resin composition of the present invention may have such additive compounds in such amounts that they do not harm its characteristic properties.

Figure 1 best illustrates the problems associated with conventional compositions used in laser welding. The laser beam1 is applied and the energy is

transmitted through the first article 2 to the second article 3 (containing laser beam absorbing colorants). The surface 4 of the second article 3 having absorbed the laser energy is thereby melted and pressed with the surface of the first article 2. However, for this weld to form, the two thermoplastic articles 2 and 3 must have different
5 transmission and absorption coefficients.

In contrast, the inventive technique illustrated in Figure 2 allows for both articles 5 and 6 to be identical in color. The effective use of the azo complex dyes in both articles 5 (colored but transparent) and 6 (colored but opaque) provides that
10 some energy is absorbed at surface 7 (but not enough to disadvantageously impact the integrity of the surface) and other energy is absorbed at surface 8. The welding of the articles occurs along surface 8, despite both articles being of identical color.

In effect, the creative use of the metallic azo complex dyes herein prepare
15 the transparent colored articles for laser beam treatment and achieve welding together with the opaque colored article. Suitable opaque articles and their compositions are described for example in DE-A-4432081.

EXAMPLES

20

The present invention is illustrated by the following examples and comparative examples.

Polyamide 6 was mixed with the colorants below in amounts as shown in the table.

25

Dye-A: 1:2 type metallic azo complex salt dye having the formula [2]

Dye-B: Sumiplast Black H3B


Dye-C: Nigrosine

Dye-D: carbon black

Dye-E: 1:2 type metallic azo complex salt dye having the following

30

formula [4]

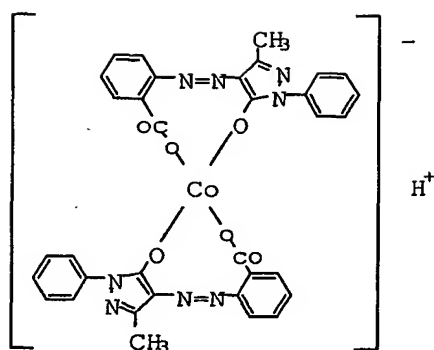

[4]

Such colorants can be blended with the polyamide as neat dyes or a master batch containing the dyes.

All samples contain 30% glass fibers, and the remainder of each composition was polyamide.

The mixtures were melted and kneaded with an extruder to provide pellets. The pelletized mixtures were injection-molded into test bars and plates with an injection molding machine.

The properties were measured as follows:

Transmission property

Transmittance of the samples with near-infrared laser beam having wavelength of 1064 nm was measured with the molded plates (3.2 mm thick) using a spectrometer (NIRS-6500 produced by Foss NIRS Systems).

Heat Stability

Heat stability of the samples (ASTM type I: 3.2 mm thick) were examined by aging such samples in an air-oven set at 150 °C for 1000 hours and surface appearances of them were visually inspected.

Tensile strength and Elongation

Tensile strength and elongation were measured according to ISO 527.

5 Laser welding test

The 60mm x 18mm x 1.5mm test pieces were placed so that 20mm of each be overlapped. The overlapped area was irradiated with Nd:YAG laser (Olion 510, 1064nm continuous) set at 4W with 3mm diameter for 2 seconds. Welding performance is measured in laser welding the test pieces of the compositions set forth in Table 1 with an opaque workpiece part for a laser beam (lower test piece), being made of the reference composition with black appearance:

	Polyamide 6	69.4 wt%
	Glass fibers	30 wt%
	Dye C	0.5 wt%
15	Dye D	0.1 wt%

As to laser weldability, in each of Example 1 through Comparative Example 4, two resin parts that are respectively transparent and opaque for such laser beams and formed of the compositions indicated in the following Table 1 being welded were judged by visual inspection.

Table 1

		Examples			Comparative Examples			
No.		1	2	3	1	2	3	4
Polyamide 6	(wt%)	69.9	69.8	69.8	70	69.9	69.5	69.8
Fiberglass	(wt%)	30	30	30	30	30	30	30
Dye A	(wt%)	0.1	0.2	0.17				
Dye B	(wt%)					0.1		
Dye C	(wt%)						0.5	
Dye D	(wt%)							0.2
Dye E	(wt%)			0.03				
Transmittance (1064nm)	(%)	45	45	46	47	23	<1	<1
Appearance		Black	Black	Black	Creamy white	Black	Black	Black
Appearance after air-oven aging		No change	No change	No change	Changed to dark brown	-	Changed to dark brown	No change
Laser weld results		welded	welded	welded	welded	No adhesion	No adhesion	No adhesion
Tensile strength	(MPa)	174		184			171	190
Elongation	(%)	3.1		3.7			3.4	3.8

- 5 Black resins with 1:2 type metallic azo complex salt exhibited equally black appearance as traditional black resins with nigrosine or carbon black as used in the above mentioned Reference composition but showed as high transmittance and welding capability as a natural color resin. Moreover, black resins with 1:2 type metallic azo complex salt retained good appearance after air-oven aging which is
- 10 required especially for automotive under-the-hood parts. Other black resins as in Comparative Examples 2,3 and 4 can not afford welding capability.

Example 4

- 400 grams of (unreinforced) Nylon 6 ZYTEL pellets (available from E.I. DuPont de Nemours and Co.) were dried under vacuum at 120°C, for more than 8
- 15 hours, then mixed with a mixture of **black** metal azo complex dye A (represented by formula [2])(0.67 g) with **yellow** metal azo complex dye E represented by the formula [4] (0.13 g) in a stainless tumble mixer with stirring for one hour. The

mixture was then injection molded to form the injection molded test specimens (whose sizes are 48 mm x 86mm x 3 mm) using K50-C produced by Kawaguchi Steel K.K. and the cylinder temperature was set to 250°C. Mold temperature was 60°C. Good and uniformly black appearance and surface gloss without color shading of the specimens were observed.

Examples 5 - 11

Unreinforced Nylon 6 ZYTEL pellets (available from E.I. DuPont de Nemours and Co.) were dried under vacuum at 120°C, for more than 8 hours, then mixed with a mixture of black metal azo complex dye A (represented by formula [2]) with yellow metal azo complex dye E represented by the formula [4] in amounts set forth in Table 2 in a stainless tumble mixer with stirring for one hour. The mixture was then injection molded to form the injection molded test specimens (whose sizes are 48 mm x 86mm x 3 mm) using K50-C produced by Kawaguchi Steel K.K. and the cylinder temperature was set to 250°C. Mold temperature was 60°C. Good and uniformly black appearance and surface gloss without color shading of the specimens were observed. Transmission properties, appearance and surface gloss were measured by the following test procedures:

(1) Transmission Properties

Transmittance (T) in the range of 400 nm to 1200 nm of the test plates with laser beams having respective wavelengths of 950 nm (Semiconductor laser) and 1050 nm (YAG laser) was measured using a U-3410 spectrometer produced by Hitachi with 60 ϕ sphere photometer for wavelength from ultraviolet to near-infrared. The ratio (TA) of transmission with 950 nm : transmission with 1050 nm and the ratio (TB) of transmission with 1050 nm : transmission of natural resin are determined and compared between the examples.

(2) Appearance and surface gloss

Appearance of the test plates were evaluated by measuring Reflection Density (OD) of the test plates by Reflection Density meter TR-927 produced by

Macbeth. Test plates having higher OD values are judged to have better surface smoothness and rich in gloss.

(3) Hue Difference ΔE

Hue difference ΔE between the test plate and the reference plate molded with a dye-mixed pellets prepared by 5 kg of Nylon 6 Zytel® pellets (available from E.I. du Pont de nemours and Company) being dried in a dehumified dryer set at 80 °C for more than 4 hour and mixed with 5 grams of carbon black and 28 grams of nigrosine dye by the following the procedures of Examples 5 through 11 was determined and measured using a colorimeter (produced by Juki, tarde name: JP 7000).

The results are set forth in Table 2.

Table 2

		Example 4	Example 5	Example 6	Example 7	Example 8	Example 9	Example 10	Example 11
Polyamide 6	(g)	400	500	500	500	500	500	500	500
Dye A	(g)	0.67	1	0.95	0.91	0.87	0.83	0.80	0.67
Dye E	(g)	0.13	0	0.05	0.09	0.13	0.17	0.20	0.33
Transmission	TA	0.43	0.43	0.43	0.43	0.43	0.43	0.43	0.49
	TB	1.00	0.96	0.96	0.98	1.00	1.00	1.01	1.03
OD ΔE		2.57	2.55	2.57	2.57	2.57	2.57	2.56	2.56
Hue difference ΔE		-	0.37	0.29	0.27	0.24	0.25	0.37	0.40

The resin compositions as in Examples 4 and 6 through 11, with a mixture of black 1:2 type metallic azo complex dye with yellow 1:2 type metallic azo complex dye, exhibit high transmitting property in the near infrared region.

The compositions set forth in Table 2 provide little if any difference in hue during laser welding with opaque articles made of compositions comprising mixtures of carbon black and nigrosine dyes. Hence, the compositions of these Examples enable two articles to be welded without hue difference and achieve laser welding of the two articles with a substantially homogenous visual impression.


IN THE CLAIMS

1. A composition suitable for laser welding comprising a thermoplastic resin and a
 5 1:2 type metallic azo complex dye.

2. A thermoplastic resin composition for laser welding comprising:


- 10 1) at least one thermoplastic resin; and,
 2) a black colorant having at least one of the metal azo complex dyes of
 the following formulas:

The formula [I]

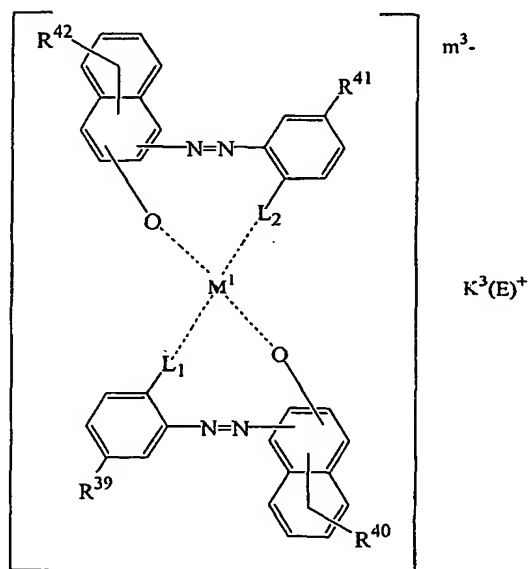

15 -----[I]

Wherein R³⁹, R⁴¹, which may be the same or different, are Cl,




, or SO_2R^{43} , R^{44} , R^{45} , which may be the same or different, are independently hydrogen atom, linear or branched C1-C4alkyl, R^{43} is linear or branched C1-C4alkyl, R^{40} , R^{42} , which may be the same or different, are hydrogen, linear or branched C1-C18alkyl group, linear or branched C2-C18alkenyl group, sulfonamide group, carboxyl group, mesyl group, hydroxyl group, C1-C18 alkoxy group, acethylamino group, benzoylamino group, a halogen atom or $-\text{CONH-R}^{46}$, R^{46} is functional group selected from unsubstituted or substituted linear or branched C1-C18alkyl or unsubstituted substituted C6-C18 aryl group, L_1 and L_2 are independently O or COO , $(\text{E})^+$ are H^+ ; cation of alkali metal, ammonium ion, cations of organic amine including aliphatic primary, secondary and tertiary amines, quaternary ammonium ion.

, K^3 is an integer, m^3 is 0, 1 or 2,


M^1 is a kind of metals, preferably metals having coordination numbers of from 2 to 4, more preferably trivalent metal such as Cr, Fe, Cu;

15 The formula [II]

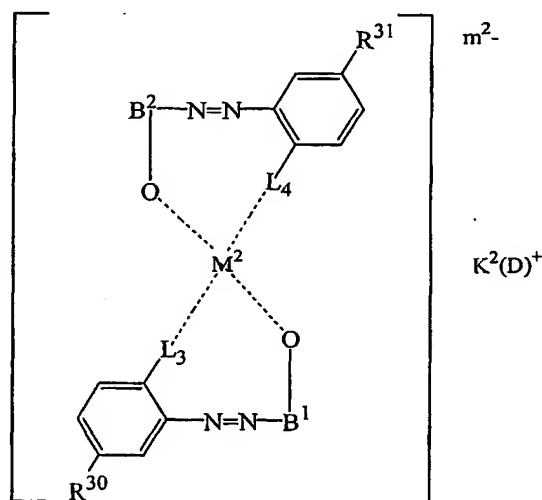

-----[II]

wherein R^{30} and R^{31} , which may be the same or different, are Cl,



SO_2R^{32} , or H,

R^{33} and R^{34} , which may be the same or different, are independently hydrogen atom,

5 linear or branched C1-C4alkyl,

R^{32} is linear or branched C1-C4alkyl, L_3 and L_4 are independently O or COO,


(D)⁺ is hydrogen ion, cation of alkali metals, ammonium ion, cations of organic amine including aliphatic primary, secondary and tertiary amines, quaternary ammonium ion,

10 K^2 is an integer, m^2 is 0, 1 or 2,

M^2 is metals of atomic numbers of from 2 to 4 such as

Zn, Sr, Cr, Al, Ti, Fe, Zr, Ni, Co, Mn, B, Si and Sn, preferably metal of atomic numbers of 3 such as Cr, Co, Cu, Ni, Al.


B is represented by formula



15


-----[III]

or

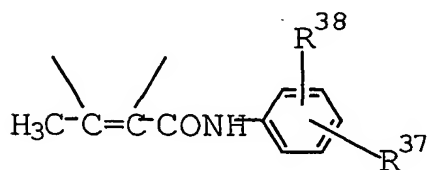

20 -----[IV]

wherein R^{35} and R^{37} , which may be the same or different, are Cl,



, SO_2R^{32} , or H,


R^{33} and R^{34} , which may be the same or different, are independently hydrogen atom,

- 5 linear or branched C1-C4 alkyl, and R^{36} and R^{38} , which may be the same or different, are independently hydrogen atom, linear or branched C1-C18 alkyl, carboxyl, hydroxyl, C1-C18 alkoxy, amino or halogen atoms.

3. The composition of Claim 1 wherein said 1:2 type metallic azo complex dye is

- 10 selected from the group consisting of:

formula (1)

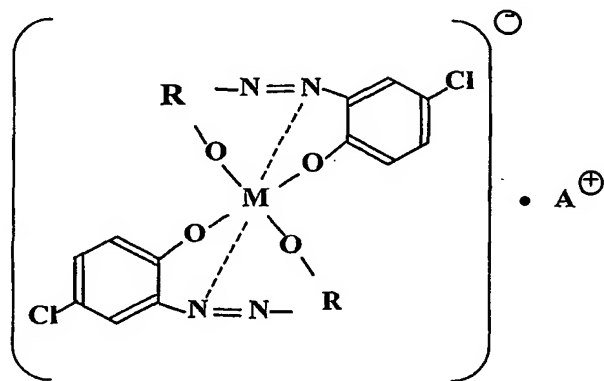

INTERNATIONAL SEARCH REPORT

Information on patent family members

Inter nal Application No

PCT/US 01/04279

Patent document cited in search report	Publication date	Patent family m mber(s)	Publication date
EP 1029650 A	23-08-2000	DE 19906828 A JP 2000309694 A	24-08-2000 07-11-2000
WO 9526869 A	12-10-1995	AT 166026 T DE 19510493 A DE 59502175 D EP 0751865 A ES 2119415 T JP 9510930 T US 5893959 A	15-05-1998 05-10-1995 18-06-1998 08-01-1997 01-10-1998 04-11-1997 13-04-1999
US 4527994 A	09-07-1985	NONE	
JP 02305832 A	19-12-1990	JP 2841077 B	24-12-1998
WO 0020157 A	13-04-2000	AU 6108199 A	26-04-2000

INTERNATIONAL SEARCH REPORT

Int. Patent Application No

PCT/US 01/04279

C.(Continuation) DOCUMENTS CONSIDERED TO BE RELEVANT

Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
A	PATENT ABSTRACTS OF JAPAN vol. 015, no. 092 (C-0811), 6 March 1991 (1991-03-06) & JP 02 305832 A (ORIENT CHEM IND LTD), 19 December 1990 (1990-12-19) abstract -----	1,3,7
A,P	WO 00 20157 A (JONES IAN ANTHONY ;WISE ROGER JEREMY (GB); WELDING INST (GB)) 13 April 2000 (2000-04-13) page 9, paragraph 5 - paragraph 6 -----	1,10

INTERNATIONAL SEARCH REPORT

International Application No

PCT/US 01/04279

A. CLASSIFICATION OF SUBJECT MATTER

IPC 7 C08K5/00 C08K13/02 C08L77/00 //(C08K13/02,5:00,3:40)

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

IPC 7 C08K

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practical, search terms used)

WPI Data, EPO-Internal, PAJ

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
A,P	EP 1 029 650 A (TICONA GMBH) 23 August 2000 (2000-08-23) claims 1,2,8,9; examples ---	1,2,10
A	WO 95 26869 A (MARQUARDT GMBH ;MUELLICH VITUS (DE)) 12 October 1995 (1995-10-12) cited in the application page 13 -page 15 ---	1,10
A	US 4 527 994 A (LIENHARD PAUL ET AL) 9 July 1985 (1985-07-09) cited in the application examples --- -/--	1,2,7

☒ Further documents are listed in the continuation of box C.☒ Patent family members are listed in annex.

* Special categories of cited documents :

A document defining the general state of the art which is not considered to be of particular relevance

E earlier document but published on or after the international filing date

L document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)

O document referring to an oral disclosure, use, exhibition or other means

P document published prior to the international filing date but later than the priority date claimed

T later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention

X document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone

Y document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art.

& document member of the same patent family

Date of the actual completion of the international search

11 June 2001

Date of mailing of the international search report

22/06/2001

Name and mailing address of the ISA

European Patent Office, P.B. 5818 Patentlaan 2
NL - 2280 HV Rijswijk
Tel. (+31-70) 340-2040, Tx. 31 651 epo nl,
Fax: (+31-70) 340-3016

Authorized officer

Engel, S

Figure 1


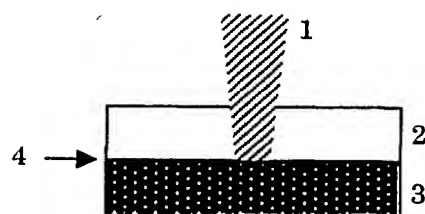


Figure 2

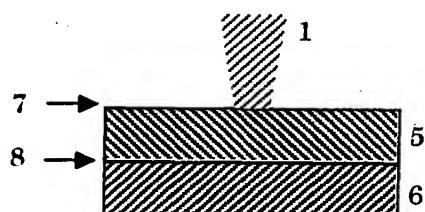

4. The composition of Claim 2 wherein said 1:2 type metallic azo complex dye is selected from formula (2) or formula (3) .

5 5. The composition of Claim 2 wherein said 1:2 type metallic azo complex dye is present in an amount of from 0.01 to 1% by weight based upon the total weight of the composition.

6. The composition of Claim 1 further comprising glass fiber or glass flake.

10

7. The composition of Claim 1 wherein said thermoplastic resin is a polyamide resin.


8. The composition of Claim 1 wherein said thermoplastic resin is a polyamide
15 copolymer.

9. The composition of Claim 1 wherein said thermoplastic resin is a blend of polyamide resins.

20 10. A shaped article of the composition of Claim 1.

Wherein R is a residual group of a coupling agent, M is divalent or trivalent metal, and A is hydrogen, aliphatic amine with 4 to 18 carbon atoms, or alkylene oxide added amine;

5 or formula (2)

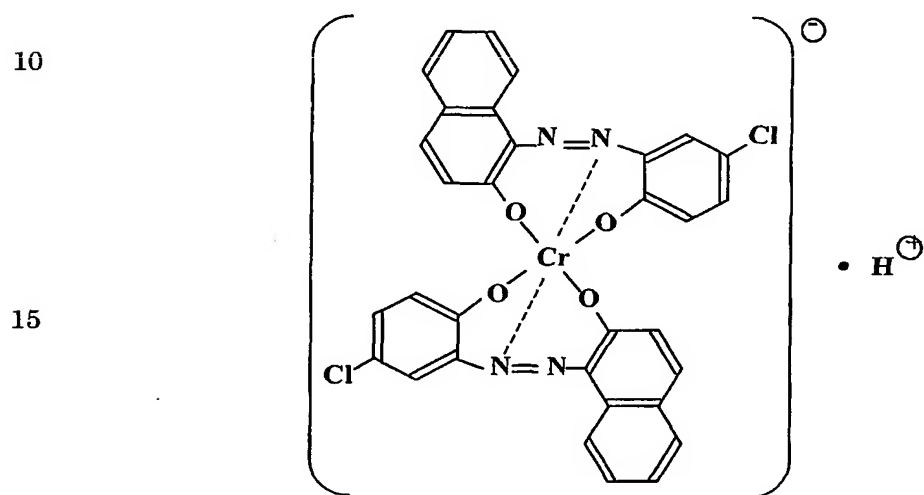

20 or formula(3)

